
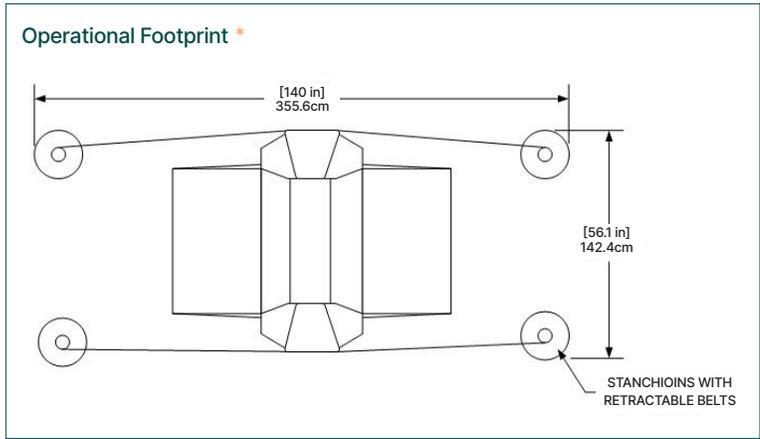


Specification Sheet

Evolv Edge®

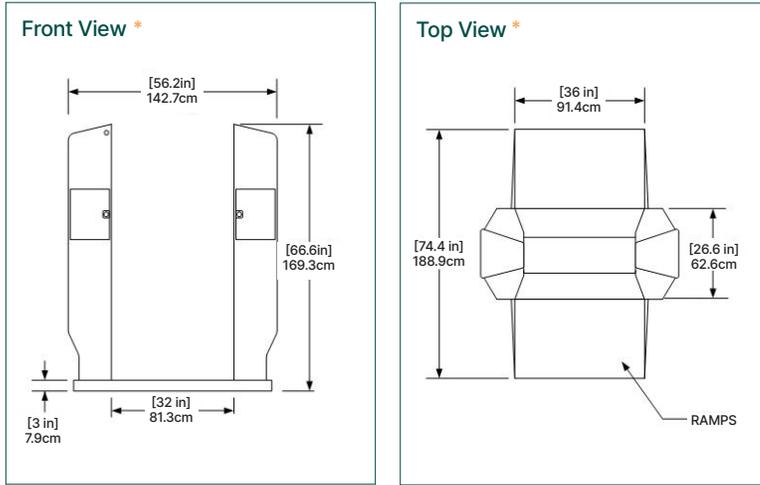

Note: *All dimensions are +/- 1 cm.

Health & Safety:



Testing & Validation:



Environmental Specifications

Operating Temperature:	0 to 40 degrees C (32 to 104 degrees F)
Storage Temperature:	0 to 40 degrees C (32 to 104 degrees F)
Relative Humidity:	0 to 95% (non-condensing)

Physical Specifications

Dimensions	Depth	188.9 cm (74.4 in)
	Width	142.7 cm (56.2 in)
	Height	169.3 cm (66.6 in)
	Weight	113.4 kg (250.0 lb)
Opening	Width	81.3 cm (32.0 in)
Power	Voltage	100-240 VAC +/-10%
	Phase	50/60 Hz
Consumption	Typical	500 watts
Input/Output:		Line Cord USB 3.0 (service access only) Ethernet (RJ45) for Tablet

Other Specifications

User Interface	Tablet (10.1 Inch Display, Free-Standing Pedestal)
Configurable Settings	<ul style="list-style-type: none"> Multiple Performance Modes Multiple Display Modes
Health & Safety	<ul style="list-style-type: none"> CE Mark (CE Directives and Standards) FCC 47 CFR Part 15 UL 61010, EN 61010 and IEC 61010 U.S. Americans with Disabilities Act Compliant Access Safe Operation – No Moving Parts
Included with Standard System	<ul style="list-style-type: none"> Integrated Wheels Retractable Stanchions Visitor Floor Mats
Optional Accessories & Add-Ons	<ul style="list-style-type: none"> External Wheel Kit Operational Test Kit System Dust Cover Kit Transport Kit Visitor Signage Kit Visitor Carpet
Testing & Validation	<ul style="list-style-type: none"> Tested by the following third parties: National Safe Skies Alliance and TNO: Netherlands Organization for Applied Scientific Research U.S. Department of Homeland Security SAFETY Act Designation Evaluated by CPNI as part of CPNI & Home Office JSaRC's High Footfall Screening Programme